



CATALOG

Better Tool, Better Works!

www.jitool.com

HEADQUARTERS

18, Jikdog-n-ro, Gwangju-si
Gyeonggi-do, Korea
Tel : +82-2-445-2500
Fax : +82-2-445-2506
E-mail : jitool@jitool.com

JITool USA CORP.

14408 Iseli Road,
Santa Fe Springs, CA 90670, USA
Tel : +1-562-404-8740
Fax : +1-562-404-8490
E-mail : jitool.orders@gmail.com

CONTENTS

C-Ringer_04~05

Nailer_06~11

Micro Pinner_12

Insulation Nailer_13


Coil Nailer_14~19

Stapler_20~38


Air Punch_39

ACCESSORIES


SQT01
SEQUENTIAL TRIP CONVERSION KIT
(FOR MODEL JCN55, JCN70 JCN80)

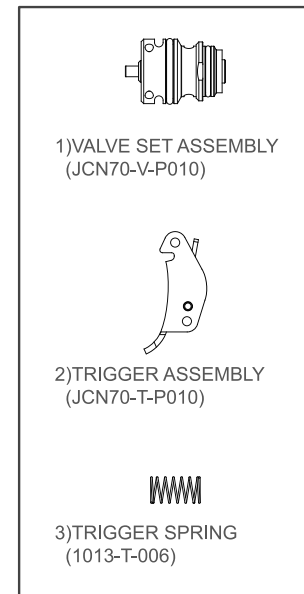


SQT02
SEQUENTIAL TRIP CONVERSION KIT
(FOR MODEL JNS50)

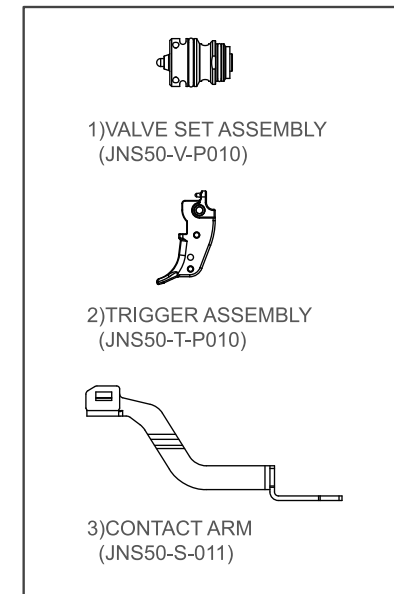

JLS38N-T-SQ1
SEQUENTIAL TRIGGER SET
(FOR MODEL JLS38N, JLS38S)

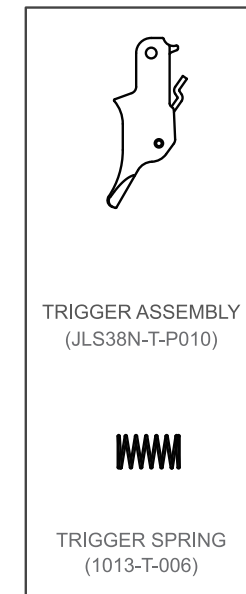

JLS38N-T-SQ2
SEQUENTIAL TRIGGER SET
(FOR MODEL JLS38N, JLS38S)

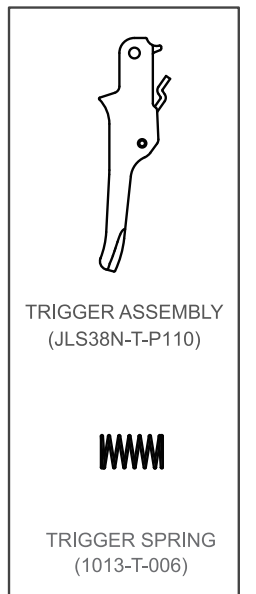

JCN65
DEPTH CONTACT ARM SET
(JCN65D-S-P001)



TRS25S, TRS25B
GUIDE COVER HAMMER
(TRS25S-G-203)



TRS25S, TRS25B
RESTRICTIVE KIT W/O TRIGGER
BOSTITCH SEQ06 SEQUENTIAL TRIGGER SET REQUIRED
(TRS25S SEQ KIT)
(TRS25S-S-P101 SINGLE SHOT CONTACT ARM)
(TRS25S-V-110 SINGLE SHOT PLUNGER)



JNS50
VINYL SIDING CONTACT FOOT
(JNS50-S-014)



JLS38S
PRECISION CONTACT ARM (JLS38S-S-001)



CS26/38
MAGNETIC TIP (CS2638-S-003)



JMS38
SIDING CONTACT ARM (JMS38-S-002)




JMCN150
DOUBLE LENGTH MAGAZINE SET (JMCN150-M-P004)



JC760

16GA. C-Ringer


- **Weight**
 - 3.48lbs(1.58kg)
- **Dimensions**
 - L: 10-13/16" (275mm)
 - H: 7-5/8" (194mm)
 - W: 3-13/16" (97mm)
- **Applications**
 - Small to Medium Bag Closure
 - Lobster, Shrimp and Crab traps
 - Netting
 - Bird control netting
 - Insulation
 - Automotive seat
- **Air Consumption**
 - 0.42L/cycle, 7kg/cm²

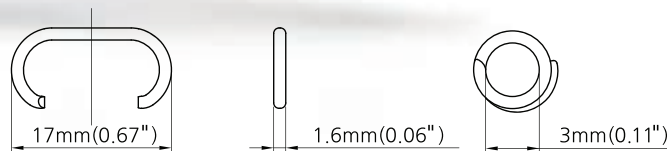

Mattress



Car seat performance

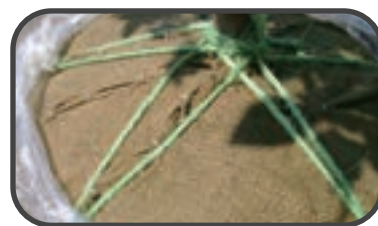

Fabric, Jute Netting


C-RINGER

JC7

15GA. C-Ringer

- **Dimensions**
 - L: 7-3/8"(187mm) H: 13-7/16" (342mm) W: 3-1/2" (89mm)
- **Weight** - 3.4lbs(1.54kg)
- **Fasteners**
 - BOSTITCH :SC7
 - MEIHO : M-6W
- **Applications**
 - Automotive Seat
 - Mattress
 - Fence Connection
- **Air Consumption**
 - 0.42L/cycle, 7kg/cm²
- **Fastener Specification**

Type	15GA. C-rings
Crown	.940" (23.9mm)
Wire Dia.	.070" (1.8mm)
Inner Diameter after Fastening	.315" (8mm)
Load Capacity	130

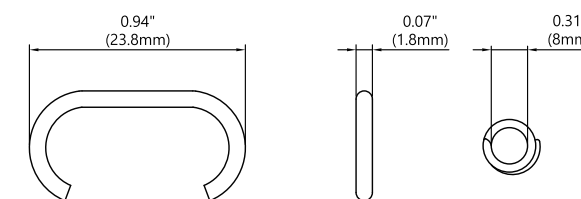


JC7C

15GA. C-Ringer


- **Dimensions**
 - L: 7-3/8"(187mm) H: 13-7/16" (342mm) W: 3-1/2" (89mm)
- **Weight** - 3.4lbs(1.54kg)
- **Fasteners**
 - BOSTITCH :SC7C
 - MEIHO : M-6CAW
- **Applications**
 - Automotive Seat
 - Mattress
 - Fence Connection
- **Air Consumption**
 - 0.42L/cycle, 7kg/cm²
- **Fastener Specification**

Type	15GA. C-rings
Crown	.940" (23.9mm)
Wire Dia.	.070" (1.8mm)
Inner Diameter after Fastening	.200"~ .240" (5mm~6mm)
Load Capacity	130

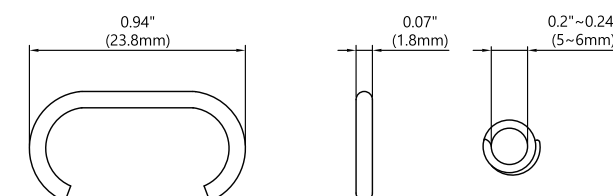

JMCN150

Metal Connector Nailer

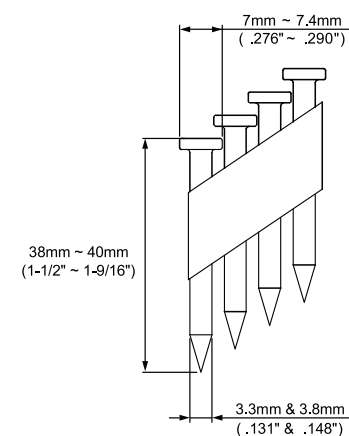

• Dimensions

- L: 11-7/16"(290mm)H: 10-4/5" (275mm) W: 5-7/16" (87mm)

• Weight - 4.5lbs(2.05kg)

• Fasteners

- Pasload : F150S-PP, Pneutool : MC150, Max : SN438J
- Bostitch : MCN150, Everwin : MCN40B, Senco : JoistPro 150XP

• Air Consumption

- 1.47L/cycle, 7kg/cm²

• Applications

- Flooring and building a wooden wall

• Features

- Most Compact Design
- Lightweight and Well Balanced
- Easily Accessible Trigger System
- Easy to Maintain and Repair

• Fastener Specification

Type	34° Paper Collated Nails
Length	1-1/2" (40mm)
Shank Dia.	.131" , .148" (3.3mm, 3.8mm)
Load Capacity	33 Nails

CS26/38

Air Concrete Nailer

• Dimensions

- L: 18-1/4"(464mm)H: 13-3/4" (349mm) W: 4-5/8" (117mm)

• Weight - 8.1lbs(3.69kg)

• Fasteners

- MAX : GS638E
- Aerosmith PBC & RBC series

• Applications

- Drywall track to concrete/ steel
- Concrete furring
- Wood to steel

• Air Consumption


- 3.11L/cycle, 7kg/cm²

• Fastener Specification

Type	Concrete Pins
Length	1/2"~ 1-1/2" (12nn~ 38mm)
Shank Dia.	.104"~ .114"(2.6mm~ 2.9mm)
Head Dia.	.252" (6.4mm)
Load Capacity	42 nails



• Magnesium Body

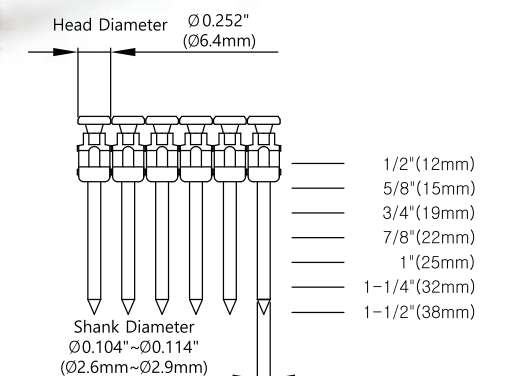

JMCN150

Double Length Magazine Set (JMCN150-M-P004)



CS26/38

Magnetic Tip (CS2638-S-003)



CS15/50

15GA. Mini Concrete Nailer

- **Dimensions**
 - L: 11-7/16"(290mm) H: 10-5/8" (268 mm) W: 3" (75.5mm)
- **Weight** - 3.81lbs(1.72kg)
- **Fasteners**
 - BEA : SKS600

- **Applications**
 - For plinth and frame work
 - Interior and building finishing
 - Light steel connections

- **Air Consumption**
 - 1.16L/cycle, 7kg/cm²

● **Fastener Specification**

Type	15GA. Concrete Nails
Length	5/8"~ 2"(15nn~ 50mm)
Width x Thickenss	.071"~ .071"(1.8mm~ 1.8mm)
Head Width	.130" (3.3mm)
Load Capacity	100 nails



CT64RS

14GA. 64mm Brad & Concrete Nailer

- **Dimensions**
 - L: 12-7/16"(316mm) H: 12-3/16" (310mm) W: 4" (101mm)
- **Weight** - 5.54 lbs(2.47kg)
- **Fasteners**
 - PASLODE : 3250-F14 404677 Series

- **Applications**
 - DT - Window & Door Molding
 - Cabinet Framing / Furniture Trim
 - ST - Trusses Building
 - Wood to Concrete/ Finish Construction

- **Air Consumption**
 - 1.96L/cycle, 7kg/cm²

● **Fastener Specification**

Length	DT : 1-3/16" ~ 2-1/2" (30mm ~ 64mm) ST : 3/4" ~ 2-1/2" (18mm ~ 64mm)
Width x Thickness	DT : .064" x .086" (1.65mm x 2.2mm) ST : .086" x .086" (2.2mm x 2.2mm)
Head Width	DT : .153" (3.9mm) ST : .256" (6.5mm)
Load Capacity	80 nails



FN21/90

21°Full Round Head Framing Nailer

- **Dimensions**
 - L: 19-11/16"(500mm) H: 13-27/32"(352mm)W: 4-5/8"(117mm)
- **Weight** - 8.4lbs(3.8kg)
- **Fasteners**
 - BOSTITCH : N Series - MAX : SN Series
 - SENCO : FramePro Series - HITACHI : NR83A

- **Applications**
 - Framing/ Truss building
 - Subflooring/ Fencing
 - Sheathing and Decking/ Crating and Pallets

- **Air Consumption**
 - 3.11L/cycle, 7kg/cm²

● **Fastener Specification**

Type	21°Plastic Collated Full Round Head Nails
Length	2" ~ 3-1/2" (50mm ~ 90mm)
Shank Dia.	.113" ~ .131" (2.9mm ~ 3.3mm)
Head Dia.	.267" ~ .295" (6.8mm ~ 7.5mm)
Load Capacity	64 Nails



FN34/90

34°Clipped Head Framing Nailer


- **Dimensions**
 - L: 17-9/16"(446mm) H: 14-9/32" (363mm) W: 4-5/8" (117mm)
- **Weight** - 8.41lbs(3.8kg)
- **Fasteners**
 - BOSTITCH : N Series - MAX : SN Series
 - SENCO : FramePro Series - HITACHI : NR83AA

- **Applications**
 - Framing/ Truss building
 - Subflooring/ Fencing
 - Sheathing and Decking/ Crating and Pallets

- **Air Consumption**
 - 3.11L/cycle, 7kg/cm²

● **Fastener Specification**

Type	34°Paper Collated Clipped Head Nails
Length	2" ~ 3-1/2" (50mm ~ 90mm)
Shank Dia.	.113" ~ .131" (2.9mm ~ 3.3mm)
Head Dia.	.267" ~ .303" (6.8mm ~ 7.7mm)
Load Capacity	90 Nails

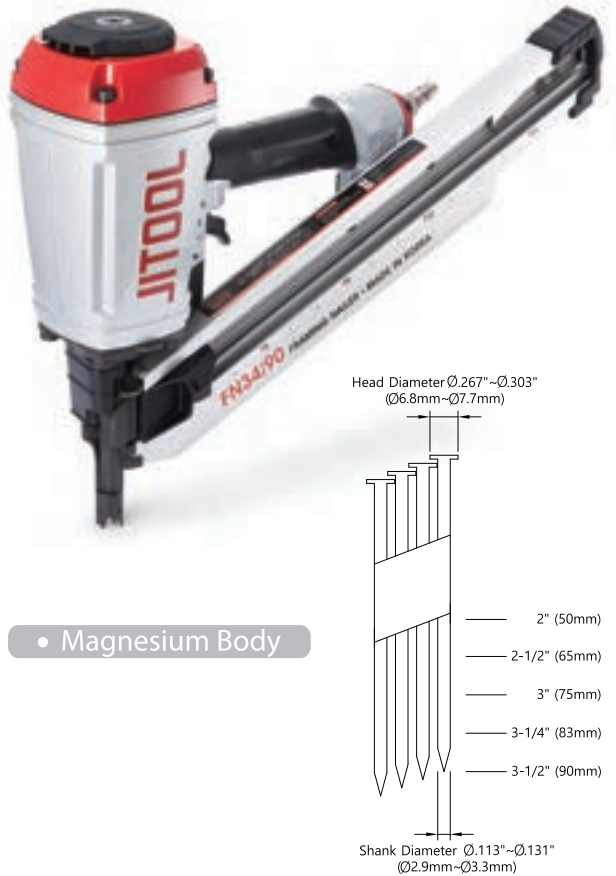


BN16/50

16GA. Finish Nailer

- **Dimensions**
 - L: 11-1/4"(286mm) H: 10-5/8" (268mm) W: 3" (75.5mm)
- **Weight** - 3.8lbs(1.72kg)
- **Fasteners**
 - BEA : SK400 Series - POTER CABLE : FN16 Series
 - HITACHI : 142 Series
- **Applications**
 - Molding & Decorative Trim
 - Furniture Trim/ Component Assembly
 - Door & Window Casings/ Picture Frame Assembly
- **Air Consumption**
 - 1.16L/cycle, 7kg/cm²
- **Fastener Specification**

Type	16GA. Finish Nails
Length	3/4" ~ 2" (19mm ~ 50mm)
Shank Dia.	.055" x .063" (1.4mm x 1.6mm)
Head Dia.	.114" (2.9mm)
Load Capacity	100 Nails

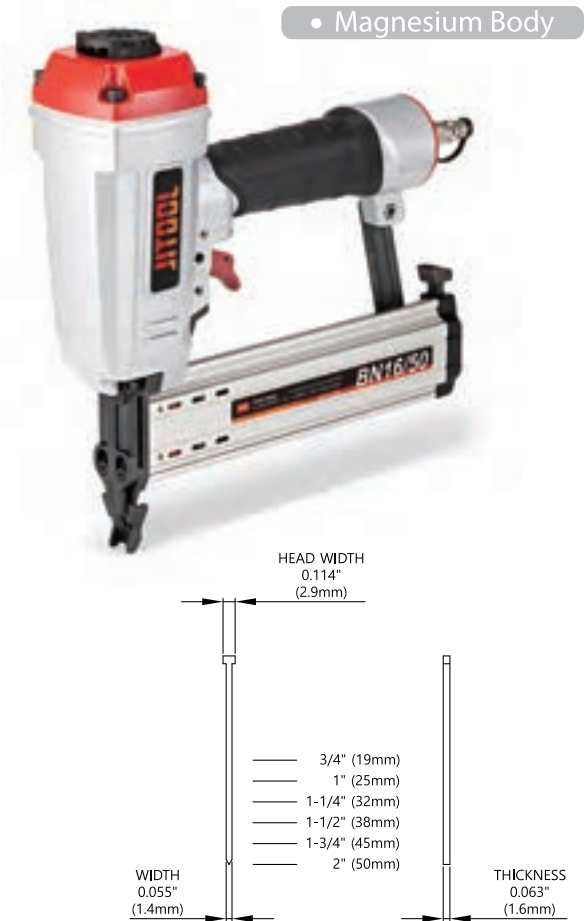

BN16/64

16GA. Finish Nailer

- **Dimensions**
 - L: 11-1/4" (286mm) H: 11-1/8" (282mm) W: 3" (75.5mm)
- **Weight** - 3.92lbs(1.78kg)
- **Fasteners**
 - BEA : SK400 Series - POTER CABLE : FN16 Series
 - HITACHI : 142 Series
- **Applications**
 - Molding & Decorative Trim
 - Furniture Trim/ Component Assembly
 - Door & Window Casings/ Picture Frame Assembly
- **Air Consumption**
 - 1.20L/cycle, 7kg/cm²
- **Fastener Specification**

Type	16GA. Finish Nails
Length	3/4" ~ 2-1/2" (19mm ~ 64mm)
Shank Dia.	.055" x .063" (1.4mm x 1.6mm)
Head Dia.	.114" (2.9mm)
Load Capacity	100 Nails




1832B

18GA. 1/1/4" Brad Nailer

- **Dimensions**
 - L: 9-11/32"(239mm) H: 7-7/16" (189mm) W: 2-3/8" (60mm)
- **Weight** - 2.42lbs(1.1kg)
- **Fasteners**
 - MAX : TA20A Series
 - HITACHI : NT Series
- **Applications**
 - Molding & Decorative Trim
 - Furniture Trim
 - Interior Trim & Exterior Trim
- **Air Consumption**
 - 0.42L/cycle, 6kg/cm²
- **Fastener Specification**

Type	18GA. Brad Nails
Length	3/4" ~ 1-1/4" (19mm ~ 32mm)
Shank Dia.	.040" x .050" (1.05mm x 1.25mm)
Head Dia.	.078" (2mm)
Load Capacity	100 Nails

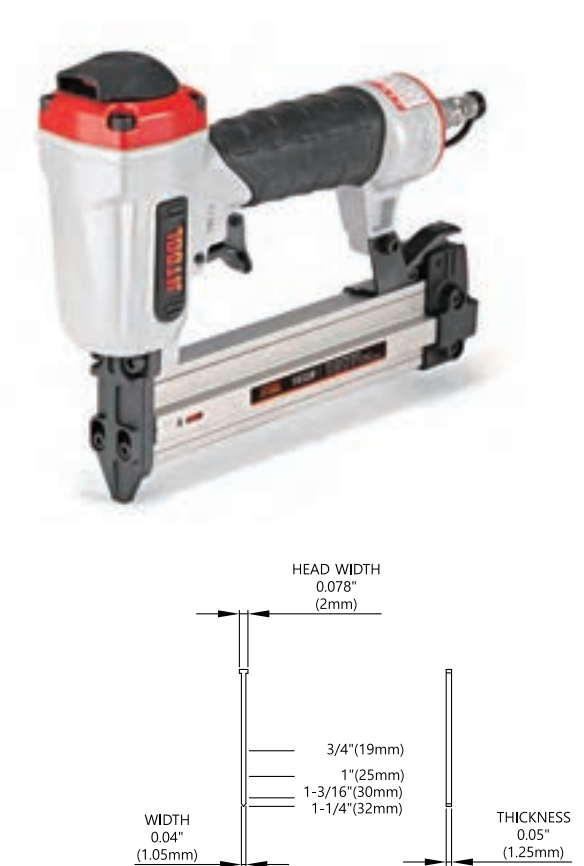

1850NL

18GA. 2" Brad Nailer

- **Dimensions**
 - L: 9-5/8"(244mm) H: 9-5/8" (244mm) W: 2-5/16" (62mm)
- **Weight** - 3.06lbs(1.39kg)
- **Fasteners**
 - MAX : NF255-ST/18 Series
 - HITACHI : NT Series
- **Applications**
 - Molding, Decorative Trim
 - Mirror & Picture Frames
 - Interior Trim & Exterior Trim
- **Air Consumption**
 - 0.56L/cycle, 6kg/cm²
- **Fastener Specification**

Type	18GA. Brad Nails
Length	3/4" ~ 2" (19mm ~ 50mm)
Shank Dia.	.040" x .050" (1.05mm x 1.25mm)
Head Dia.	.078" (2mm)
Load Capacity	100 Nails



630R

23GA. 1-3/16" Micro Pinner

- Dimensions
 - L: 9-7/16"(240mm) H: 7-3/8"(188mm)W: 1-7/8"(48mm)
- Weight - 2.36lbs(1.07kg)
- Fasteners
 - MAX : NF235A/23-35 - SENCO : FinishPro 11/CZ
 - BOSTITCH : HP118K/PT1312
- Applications
 - Cabinets - Trim
 - Finish and Trim
 - Mirror and Picture Frames
- Air Consumption
 - 0.21L/cycle, 6kg/cm²
- Fastener Specification

Type	23GA. Micro Pins
Length	3/8" ~ 1-3/16" (10mm ~ 30mm)
Width x Thickness	.025" x .025" (.64mm x .64mm)
Load Capacity	200



640S

23GA. 1-9/16" Micro Pinner

- Dimensions
 - L: 9-15/16"(252mm) H: 7-7/8"(200mm) W: 1-7/8"(47mm)
- Weight - 2.64lbs(1.20kg)
- Fasteners
 - MAX : NF235A/23-35 - SENCO : FinishPro 10/CZ
 - BOSTITCH : HP118K/PT1312
- Applications
 - Cabinets - Trim
 - Finish and Trim
 - Mirror and Picture Frames
- Air Consumption
 - 0.23L/cycle, 6kg/cm²
- Fastener Specification

Type	23GA. Micro Pins
Length	5/8" ~ 1-9/16" (15mm ~ 40mm)
Width x Thickness	.025" x .025" (.64mm x .64mm)
Load Capacity	200



IN160

Insulation Nailer

- Dimensions
 - L: 17-11/16"(449mm)H: 12-7/8" (328mm)W: 4-13/16" (123mm)
- Weight - 7.05lbs(3.2kg)
- Fasteners
 - Insulation Nails
- Applications
 - Fix the insulation layer on the concrete and brick
- Air Consumption
 - 5.01L/cycle, 7kg/cm²
- Fastener Specification

Type	Insulation Nails
Length	1-3/16" ~ 6-5/16" (30mm ~ 160mm)
Shank Dia.	.138" (3.5mm)
Head Dia.	.291"(7.4mm)
Load Capacity	1 nails



IN160SC

Single Concrete Pin Nailer

- Dimensions
 - L: 13" (328mm) H: 17 "(434mm) W: 4-7/8" (123mm)
- Weight - 7.5lbs(3.4kg)
- Fasteners
 - Single Concrete Nails
- Applications
 - Fastening wood, steel or other thin metal to concrete walls
- Air Consumption
 - 5.01L/cycle, 7kg/cm²
- Fastener Specification

Type	Concrete Nail
Length	3/4" ~ 3" (19mm ~ 75mm)
Shank Dia.	.145" (3.68mm)
Head Dia.	.300"(7.62mm)
Load Capacity	1 Nails



JCN65

Industrial Coil Nailer


- Dimensions
 - L: 11-3/4" (298.8mm) H: 12" (305mm) W: 5" (128mm)
- Weight - 6.5lbs (2.94kg)
- Fasteners
 - EVERWIN : PN65M - MAX : CN665
- Applications
 - Making and Repairing wooden pallets and boxes
 - Types of packing and crating work
 - Fencing, framing, roof decking, flooring
 - Flooring and building a wooden wall
- Air Consumption
 - 2.08L/cycle, 7kg/cm²
- Fastener Specification

Type	15° Flat Wire Welded Nails
Length	1-1/2" ~ 2-1/2" (38mm ~ 65mm)
Shank Dia.	.090"~ .113" (2.3mm~2.9mm)
Head Dia.	.224"~ .283" (5.7mm~7.2mm)
Load Capacity	225~300 Nails



● Magnesium Body

15 Degree Flat Wire Welded Nails

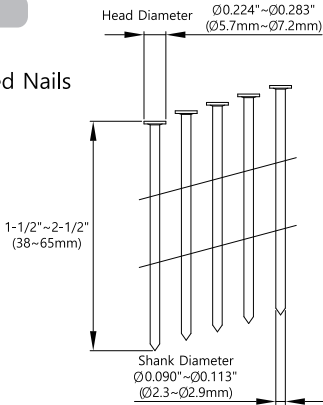

DEPTH CONTACT ARM SET (JCN65D-S-P001)



JN65S

Siding Coil Nailer


- Dimensions
 - L: 10-11/32" (263mm) H: 12" (305mm) W: 5-5/16" (134mm)
- Weight - 4.6lbs (2.1kg)
- Fasteners
 - BOSTITCH : N66C
 - MAX : CN565S
 - HITACHI : NV65AH
- Applications
 - General construction work including siding
 - Decking/ Panel sheathing
- Air Consumption
 - 1.57L/cycle, 7kg/cm²
- Fastener Specification

Type	15° Flat Wire Welded Nails/ 15° Flat Plastic Sheet Collated Nails
Length	Flat Wire : 1-3/4" ~ 2-1/2" (45mm ~ 65mm) Flat Plastic : 1-1/4" ~ 2-1/2" (32mm ~ 65mm)
Shank Dia.	.092"~ .099" (2.3mm x 2.5mm)
Head Dia.	.197"~ .236" (5.0~6.0mm)
Load Capacity	200~300 Nails




● Magnesium Body

15° Degree Flat Wire Welded Nails

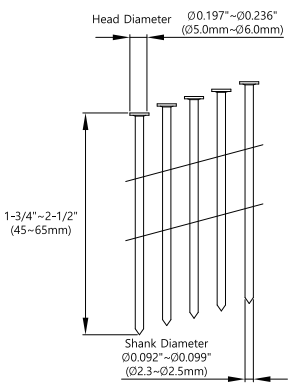

15° Degree Flat Plastic sheet Collated Nails

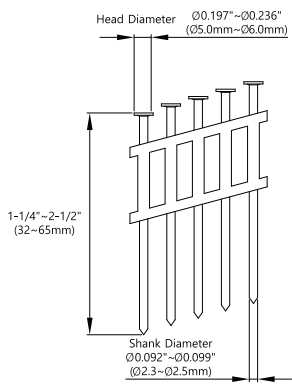

JN45R

Roofing Coil Nailer


- Dimensions
 - L: 10-1/2" (267mm) H: 10-1/2" (267mm) W: 4-7/16" (113mm)
- Weight - 4.98lbs (2.26kg)
- Fasteners
 - BOSTITCH : RN45B - MAX : CN 450R, CN445R
 - SENCO : RoofPro Series - HITACHI : NV45 Series
- Applications
 - Siding Installation
 - Wooden Box Assembly
 - Fastening asphalt & fiberglass shingles
- Air Consumption
 - 1.52L/cycle, 7kg/cm²
- Fastener Specification

Type	15° Roofing Coil Nails
Length	3/4" ~ 1-3/4" (19mm ~ 45mm)
Shank Dia.	.120" (3.05mm)
Head Dia.	.413" (10.5mm)
Load Capacity	120 Nails



● Magnesium Body

15° Degree Dome Wire Welded Nails



JCN55 Industrial Coil Nailer ENERGY BOOSTED

- Dimensions
 - L: 10-5/8" (270mm) H: 11-5/8" (283mm) W: 5-1/8" (131mm)
- Weight - 5.5lbs(2.5kg)
- Fasteners
 - MAX : CN55
- Applications
 - Pallet Assembly - Crate Assembly
- Features
 - Designed to drive up to 2-1/4" nail with **extra power**
 - 20% more energy**
 - Multi-directional exhaust cover**
- Air Consumption
 - 1.56L/cycle, 7kg/cm²
- Fastener Specification

Type	15° Flat Wire Welded Nails
Length	1" ~ 2-1/4" (25mm ~ 57mm)
Shank Dia.	.083"~ .090" (2.1mm~2.3mm)
Head Dia.	.197"~ .224" (5.0mm~5.7mm)
Load Capacity	300~400 Nails



JCN55E Industrial Coil Nailer ENERGY BOOSTED

- Dimensions
 - L: 10-5/8" (270mm) H: 11-5/8" (283mm) W: 5-1/8" (131mm)
- Weight - 5.5lbs(2.5kg)
- Fasteners
 - MAX : CN55
- Applications
 - Pallet Assembly - Crate Assembly
- Features
 - Designed to drive up to 2-1/4" nail with **extra power**
 - 15% more energy**
 - Fixed exhaust system**
- Air Consumption
 - 1.56L/cycle, 7kg/cm²
- Fastener Specification

Type	15° Flat Wire Welded Nails
Length	1" ~ 2-1/4" (25mm ~ 57mm)
Shank Dia.	.083"~ .090" (2.1mm~2.3mm)
Head Dia.	.197"~ .224" (5.0mm~5.7mm)
Load Capacity	300~400 Nails



JCN70 Industrial Coil Nailer

- Dimensions
 - L: 12-1/16"(306mm) H: 12-7/16" (315mm) W: 5" (128mm)
- Weight - 7.6lbs(3.5kg)
- Fasteners
 - MAX : CN70
- Applications
 - Making and Repairing wooden pallets and boxes
 - Types of packing and crating work
 - Fencing, framing, roof decking, flooring
 - Flooring and building a wooden wall
- Air Consumption
 - 2.48L/cycle, 7kg/cm²
- Fastener Specification

Type	15° Flat Wire Welded Nails
Length	1-3/4" ~ 2-3/4" (45mm ~ 70mm)
Shank Dia.	.090"~ .113" (2.3mm~2.9mm)
Head Dia.	.224"~ .283" (5.7mm~7.2mm)
Load Capacity	225~300 Nails



JCN80 Industrial Coil Nailer

- Dimensions
 - L: 13-13/16"(351mm) H: 13-1/4" (336.5mm) W: 5-3/8" (137mm)
- Weight - 8.3lbs(3.76kg)
- Fasteners
 - MAX : CN80
 - HITACHI : NV83
- Applications
 - Making and Repairing wooden pallets and boxes
 - All Types of packing and crating work
 - Fencing, framing, roof decking, flooring
- Air Consumption
 - 2.65L/cycle, 7kg/cm²
- Fastener Specification

Type	15° Flat Wire Welded Nails
Length	2" ~ 3-1/4" (50mm ~ 83mm)
Shank Dia.	.099"~ .131" (2.5mm~3.3mm)
Head Dia.	.224"~ .283" (5.7mm~7.2mm)
Load Capacity	250~300 Nails



JCN70PALMachine-Mounted Coil Nailer

- Dimensions
 - L: 12-1/16"(306mm)H: 12-7/16"(315mm)W: 4-7/16"(113mm)
- Weight - 6.6lbs(3.0kg)
- Fasteners
 - MAX : CN70
- Applications
 - Machine-Mounted
 - Pallet Assembly
 - Crate Assembly
 - Manufactured Housing
- Air Consumption
 - 2.48L/cycle, 7kg/cm²
- Fastener Specification

Type	15° Flat Wire Welded Nails
Length	1-3/4" ~ 2-3/4" (45mm ~ 70mm)
Shank Dia.	.090"~ .113" (2.3mm~2.9mm)
Head Dia.	.224"~ .283" (5.7mm~7.2mm)



JCN80PALMachine-Mounted Coil Nailer

- Dimensions
 - L: 13-13/16"(351mm)H: 13-1/4"(336.5mm)W: 4-7/16"(113mm)
- Weight - 7.3lbs(3.3kg)
- Fasteners
 - MAX : CN80 - HITACHI : NV83
- Applications
 - Machine-Mounted
 - Pallet Assembly
 - Crate Assembly
 - Manufactured Housing
- Air Consumption
 - 2.65L/cycle, 7kg/cm²
- Fastener Specification

Type	15° Flat Wire Welded Nails
Length	2" ~ 3-1/4" (50mm ~ 83mm)
Shank Dia.	.099"~ .131" (2.5mm~3.3mm)
Head Dia.	.224"~ .283" (5.7mm~7.2mm)



JN55CIndustrial Coil Nailer

- Dimensions
 - L: 10-3/4"(273mm)H: 10-19/32"(269mm)W: 5-5/16"(135mm)
- Weight - 5.8lbs(2.63kg)
- Fasteners
 - MAX : CN55 - BOSTITCH : N57C
 - SENCO : PalletPro 57F
- Applications
 - Making wooden crate
 - Making and Repairing Pallets
 - Fencing, Siding , Decking and Sheathing
- Air Consumption
 - 1.50L/cycle, 7kg/cm²
- Fastener Specification

Type	15° Flat Wire Welded Nails
Length	1" ~ 2-1/4" (25mm ~ 57mm)
Shank Dia.	.083"~ .090" (2.1mm~2.3mm)
Head Dia.	.197"~ .224" (5.0mm~5.7mm)
Load Capacity	300~400 Nails



JN100CIndustrial Coil Nailer


- Dimensions
 - L: 14-7/8"(378mm)H: 15-15/16"(405mm)W: 6"(153mm)
- Weight - 12.4lbs(5.6kg)
- Fasteners
 - MAX : CN100
- Applications
 - Making wooden pallets
 - Heavy duty wooden boxes
 - Crating
 - Packaging
- Air Consumption
 - 4.84L/cycle, 7kg/cm²
- Fastener Specification

Type	15° Flat Wire Welded Nails
Length	2-1/2" ~ 4" (65mm ~ 100mm)
Shank Dia.	.113"~ .131 (2.9mm ~ 3.3mm)
Head Dia.	.276"~ .295 (7.0mm ~ 7.5mm)
Load Capacity	200~250 Nails



HEAVY DUTY JNS50HD

16GA. 7/16" Medium Crown Stapler

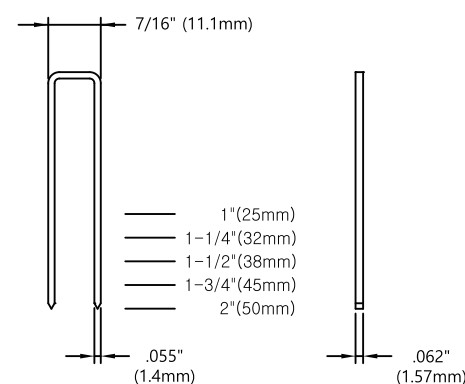

● Features

- Quick Firing Trigger System
- End cap filter included
- Easily accessible jam clearing system
- Trigger locking mechanism
- Adjustable depth control
- Easy bolt on/off system for clearing jams
- Equipped with a covered guide body for heavy duty and high speed operations.

● Applications

- Flooring and building a wooden wall
- Fencing, framing, roof decking, flooring
- Types of packing and crating work
- Making and Repairing wooden pallets and boxes

JNS45

16GA. 7/16" Medium Crown Stapler

● Dimensions

- L: 13-3/4"(349mm) H: 11-3/4" (298mm) W: 3-11/16" (94mm)

● Weight - 4.9lbs(2.22kg)

● Fasteners

- MAX : TA551 - SENCO : SNS45XP/N
- HITACHI : N5008AC/11200

● Applications


- Sheathing and Subflooring
- Roof Decking - Crate & Wooden box
- Furniture & Pallets

● Air Consumption

- 1.64L/cycle, 7kg/cm²

● Fastener Specification

Type	16GA. 7/16" Medium Crown Staples
Length	1"~ 2" (25mm~50mm)
Crown	7/16" (11.1mm)
Width x Thickness	.055" x .062" (1.4mm~1.57mm)
Load Capacity	160

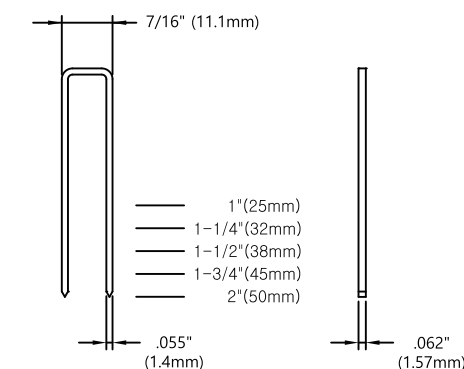

JNS45L

16GA. 7/16" Medium Crown
Double Length Magazine Stapler

● Dimensions

- L: 23-7/32" (590mm) H: 11-3/4" (298mm) W: 3-11/16" (94mm)

● Weight - 7.38lbs(3.35kg)

● Fasteners

- MAX : TA551
- SENCO : SNS45XP/N

● Applications


- Furniture & Pallets
- Machine Automation

● Air Consumption

- 1.64L/cycle, 7kg/cm²

● Fastener Specification


Type	16GA. 7/16" Medium Crown Staples
Length	1"~ 2" (25mm~50mm)
Crown	7/16" (11.1mm)
Width x Thickness	.055" x .062" (1.4mm~1.57mm)
Load Capacity	320

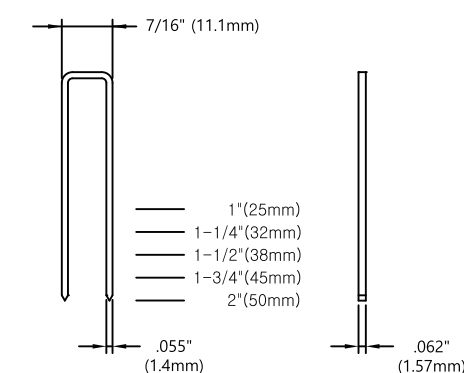

JNS5016GA. 7/16" Medium Crown Stapler

- Dimensions
 - L: 11-5/8"(294.5mm)H: 13-15/16" (353.5mm)W: 3-4/16"(81mm)
- Weight - 5.07lbs(2.3kg)
- Fasteners
 - MAX : TA551 - SENCO : SNS45XP/N
 - HITACHI : N5008AC/11200
- Applications
 - Flooring and building a wooden wall
 - Fencing, framng, roof decking, flooring
 - Types of packing and crating work
- Air Consumption
 - 1.42L/cycle, 7kg/cm²
- Fastener Specification

Type	16GA. 7/16" Medium Crown Staples
Length	1"~ 2" (25mm~50mm)
Crown	7/16" (11.1mm)
Width x Thickness	.055" x .062" (1.4mm~1.57mm)
Load Capacity	160

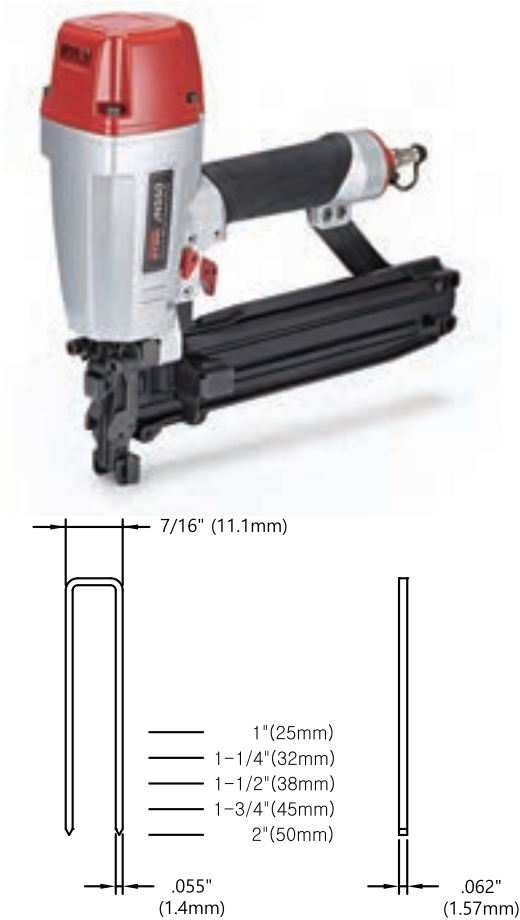

JPS3816GA. 1" Wide Crown Stapler

- Dimensions
 - L: 10-5/16"(262mm) H: 14-5/16" (364mm) W: 3" (76mm)
- Weight - 5.0lbs(2.28kg)
- Fasteners
 - DUO FAST : RNS17481/1716CGR
 - HITACHI : N5024A/11300 - SENCO : PW150R/P
- Applications
 - General construction work
 - Lathing
 - Sheathing
- Air Consumption
 - 1.17L/cycle, 7kg/cm²
- Fastener Specification

Type	16GA. 1" Wide Crown Staples
Length	3/4"~ 1-1/2" (19mm~38mm)
Crown	1" (26.2mm)
Width x Thickness	.055" x .062" (1.40mm~1.57mm)
Load Capacity	160



SQT02SEQUENTIAL TRIP CONVERSION KITVINYL SIDING CONTACT FOOT (JNS50-S-014)

1) VALVE SET ASSEMBLY
(JNS50-V-P010)

2) TRIGGER ASSEMBLY
(JNS50-T-P010)

3) CONTACT ARM
(JNS50-S-011)



JPS38R16GA. 1" Wide Crown Roofing Stapler

- Dimensions
 - L: 14-7/16" (367mm) H: 10-3/8" (263mm) W: 3-17/32" (90mm)
- Weight - 5.3lbs(2.40kg)
- Fasteners
 - SENCO : PW150R/P - HITACHI : N5024A/11300
 - DUO FAST : RNS-17481/1716CGR Series
- Applications
 - Fastening asphalt & fiberglass Roof shingles
 - Construction
 - Wooden working-furniture, Box assembly
- Air Consumption
 - 1.17L/cycle, 7kg/cm²

Type	16GA. 1" Wide Crown Staples
Length	3/4" ~ 1" (19mm ~ 38mm)
Crown	1" (26.2mm)
Width x Thickness	.055" x .062" (1.40mm~1.57mm)
Load Capacity	160




JPS50

16GA. 1" Wide Crown Stapler

- Dimensions
 - L: 14-1/4"(361mm) H: 9-11/16 "(246mm) W: 3-5/16 "(84mm)
- Weight - 5.4lbs(2.42kg)
- Fasteners
 - SENCO : PS20XP
 - EVERWIN : SN402P - METABO : N5024A2
- Applications
 - Wire Lathing - Wire Fencing
 - Foam Insulation Board - Corrugated Carton to Skid
 - Furniture & Cabinet Frames
- Air Consumption
 - 1.21L/cycle, 7kg/cm²
- Fastener Specification

Type	16GA. 1" Wide Crown Staples
Length	1"~ 2" (25mm~50mm)
Crown	1" (26.2mm)
Width x Thickness	.055" x .062" (1.40mm~1.57mm)
Load Capacity	160

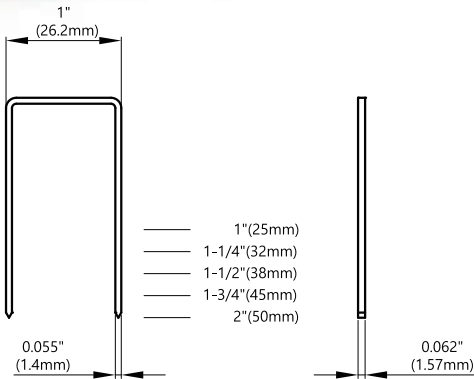


JPS50P

16GA. 15/16" Wide Crown Stapler

- Dimensions
 - L: 14-1/4" (361mm) H: 9-11/16 "(263mm) W: 3-5/16 "(84mm)
- Weight - 5.3lbs(2.39kg)
- Fasteners
 - PASLODE : WCS200
- Applications
 - Wire Lathing - Wire Fencing
 - Foam Insulation Board - Corrugated Carton to Skid
 - Furniture & Cabinet Frames
- Air Consumption
 - 1.21L/cycle, 7kg/cm²
- Fastener Specification

Type	16GA. 15/16" Wide Crown Staples
Length	1" ~ 2" (25mm ~ 50mm)
Crown	15/16" (23.6mm)
Width x Thickness	.055" x .062" (1.40mm~1.57mm)
Load Capacity	160

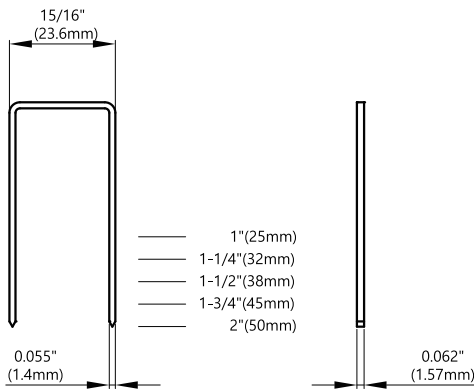


JPS50B

16GA. 1" Wide Crown Stapler

- Dimensions
 - L: 14-1/4"(361mm) H: 9-11/16 "(246mm) W: 3-5/16 "(84mm)
- Weight - 5.3lbs(2.40kg)
- Fasteners
 - BOSTITCH : 450S2-1
 - EVERWIN : SN402S2
- Applications
 - Wire Lathing - Wire Fencing
 - Foam Insulation Board - Corrugated Carton to Skid
 - Furniture & Cabinet Frames
- Air Consumption
 - 1.21L/cycle, 7kg/cm²
- Fastener Specification

Type	16GA. 1" Wide Crown Staples
Length	1"~ 2" (25mm~50mm)
Crown	1" (25mm)
Width x Thickness	.055" x .062" (1.40mm~1.57mm)
Load Capacity	160

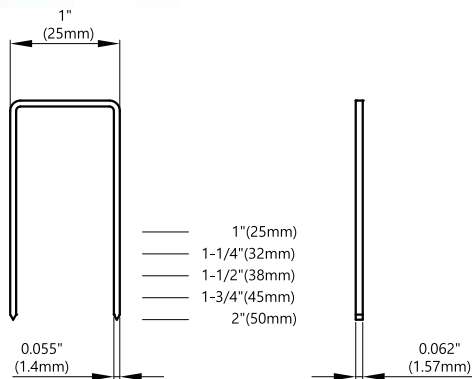


JPS65B

16GA. 1" Wide Crown Stapler

- Dimensions
 - L: 14-1/4" (361mm) H: 10-1/8 "(258mm) W: 14-1/4" (84mm)
- Weight - 5.7lbs(2.59kg)
- Fasteners
 - SPOTNAILS : X1S1664
- Applications
 - Foam Insulation Board
 - Wire Lathing
 - Furniture & Cabinet Frames
 - Corrugated Carton to Skid
- Air Consumption
 - 1.27L/cycle, 7kg/cm²
- Fastener Specification

Type	16GA. 1" Wide Crown Staples
Length	1-1/4" ~ 2-1/2" (32mm ~ 65mm)
Crown	1" (25mm)
Width x Thickness	.055" x .062" (1.40mm~1.57mm)
Load Capacity	160

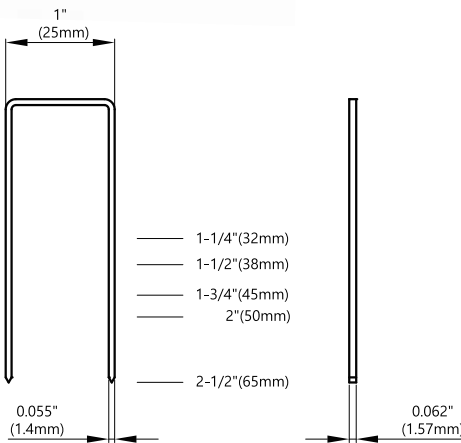

TRS25B

16GA. 1" Wide Crown Stapler


- Dimensions
 - L: 14-13/16"(376mm) H: 9" (229mm) W: 3-17/32" (90mm)
- Weight - 5.31lbs(2.41kg)
- Fasteners
 - BOSTITCH : BCS(16S2) Series
- Applications
 - Truss
 - Sheathing
 - Furniture framing
 - General construction works
- Air Consumption
 - 0.98L/cycle, 7kg/cm²
- Fastener Specification

Type	16GA. 1" Wide Crown Staples
Length	1/2"~ 1" (13mm~25mm)
Crown	1" (25mm)
Width x Thickness	.055" x .062" (1.4mm~1.57mm)
Load Capacity	160



• Magnesium Body

Unrestricted Quick Firing trigger system.

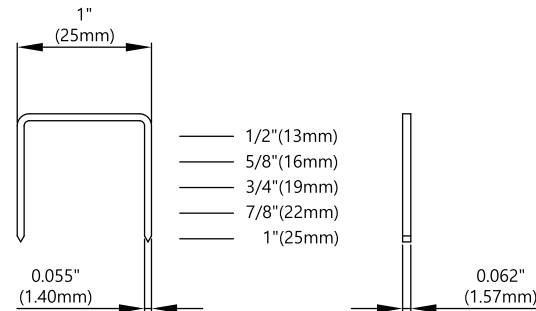

TRS25S

16GA. 1" Wide Crown Stapler


- Dimensions
 - L: 14-13/16"(376mm) H: 9" (229mm) W: 3-17/32" (90mm)
- Weight - 5.35lbs(2.43kg)
- Fasteners
 - SENCO : P Series
- Applications
 - Truss
 - Sheathing
 - Furniture framing
 - General construction works
- Air Consumption
 - 0.98L/cycle, 7kg/cm²
- Fastener Specification

Type	16GA. 1" Wide Crown Staples
Length	1/2" ~ 1" (13mm~25mm)
Crown	1" (26.2mm)
Width x Thickness	.055" x .062" (1.4mm~1.57mm)
Load Capacity	160



• Magnesium Body

Unrestricted Quick Firing trigger system.

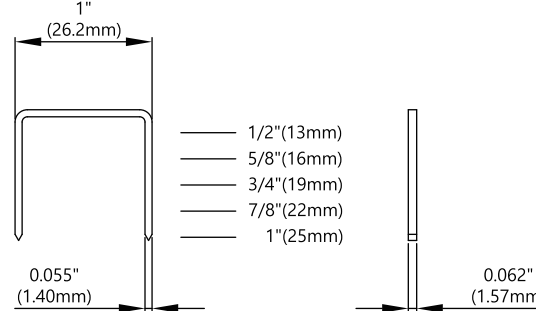

TRS25SB

16GA. 1" Wide Crown Stapler


- Dimensions
 - L: 14-13/16"(376mm) H: 9" (229mm) W: 3-17/32" (90mm)
- Weight - 5.35lbs(2.43kg)
- Fasteners
 - SENCO : P Series
- Applications
 - Truss
 - Sheathing
 - Furniture framing
 - General construction works
- Air Consumption
 - 0.98L/cycle, 7kg/cm²
- Fastener Specification

Type	16GA. 1" Wide Crown Staples
Length	1/2" ~ 1" (13mm~25mm)
Crown	1" (26.2mm)
Width x Thickness	.055" x .062" (1.40mm~1.57mm)
Load Capacity	160



• Magnesium Body

Unrestricted Quick Firing trigger system.

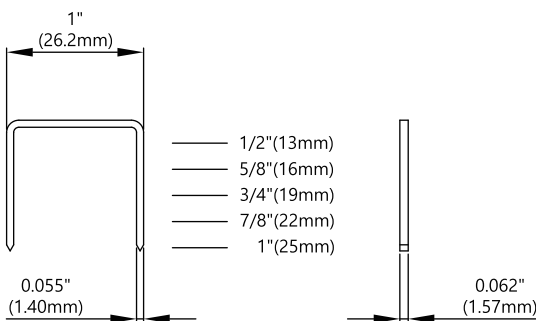

GUIDE COVER HAMMER (TRS25S-G-203)



RESTRICTIVE KIT W/O TRIGGER
BOSTITCH SEQ06 SEQUENTIAL TRIGGER SET REQUIRED
(TRS25S SEQ KIT)
(TRS25S-S-P101 SINGLE SHOT CONTACT ARM)
(TRS25S-V-110 SINGLE SHOT PLUNGER)



TRS38S

16GA. 1" Wide Crown Stapler

- Dimensions
 - L: 14-1/4" (362mm) H: 10-5/16" (262mm) W: 3" (76mm)
- Weight - 5.3lbs(2.42kg)
- Fasteners
 - DUO FAST : RNS-17481/1716CGR
 - HITACHI : N5024/11300 - SENCO : PW/P Series
- Applications
 - Lathing & Insulation - Box Assembly
 - Construction - Wooden working-furniture
- Air Consumption
 - 1.17L/cycle, 7kg/cm²
- Fastener Specification

Type	16GA. 1" Wide Crown Staples
Length	3/4"~ 1-1/2" (19mm~38mm)
Crown	1" (26.2mm)
Width x Thickness	.055" x .062" (1.4mm~1.57mm)
Load Capacity	160

- Unrestricted Quick Firing trigger system.
- Magnesium Body




JLS38S

18GA. 1/4" Narrow Crown Stapler

- Dimensions
 - L: 12-1/8" (307mm) H: 9-5/16" (236mm) W: 2-3/8" (60mm)
- Weight - 2.95lbs(1.35kg)
- Fasteners
 - BEA : NS/90 Series - SENCO : SLS/L Series
 - DUO FAST : SURESHOT 1820/1800
- Applications
 - Cabinets
 - Wooden Crate
 - Furniture Manufacturing
- Air Consumption
 - 0.69L/cycle, 7kg/cm²
- Fastener Specification

Type	18GA. 1/4" Narrow Crown Staples
Length	1/2"~ 1-1/2" (13mm~38mm)
Crown	1/4" (5.8mm)
Width x Thickness	.044" x .050" (1.1mm~1.27mm)
Load Capacity	170

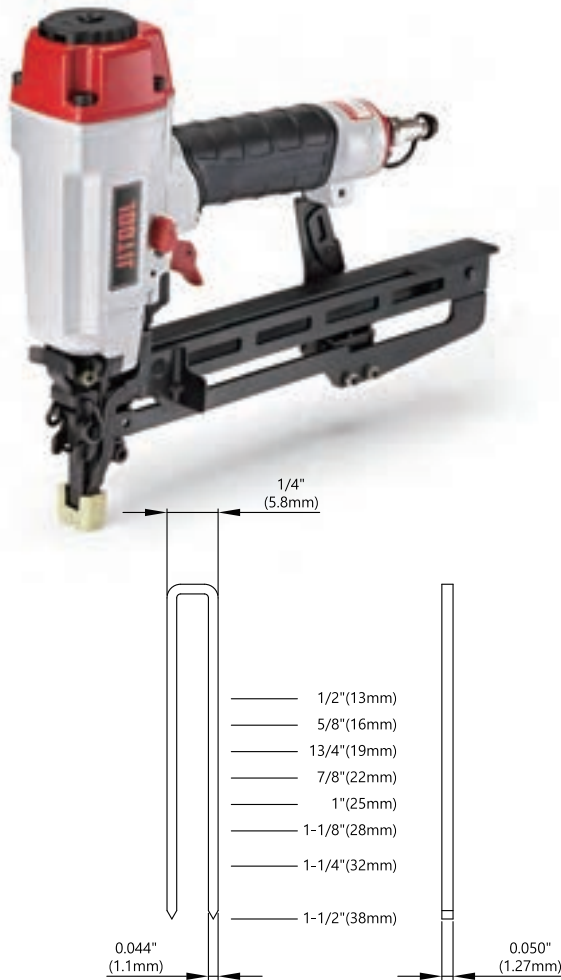


JLS38N

18GA. 1/4" Narrow Crown Stapler

- Dimensions
 - L: 12-1/8" (307mm) H: 9-5/16" (236mm) W: 2-3/8" (60mm)
- Weight - 2.95lbs(1.35kg)
- Fasteners
 - BEA : NS/90 Series - SENCO : SLS/L Series
 - DUO FAST : SURESHOT 1820/1800
- Applications
 - Cabinets
 - Wooden Crate
 - Furniture Manufacturing
- Air Consumption
 - 0.69L/cycle, 7kg/cm²
- Fastener Specification


Type	18GA. 1/4" Narrow Crown Staples
Length	1/2"~ 1-1/2" (13mm~38mm)
Crown	1/4" (5.8mm)
Width x Thickness	.044" x .050" (1.1mm~1.27mm)
Load Capacity	170

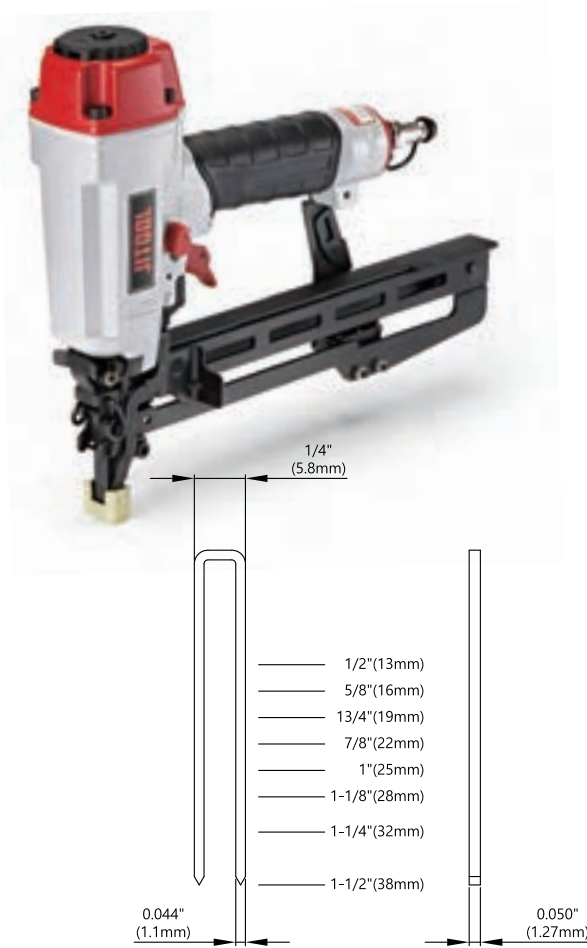

PRECISION CONTACT ARM (JLS38S-S-001)



JLS38N-T-SQ1 JLS38N-T-SQ2
(FOR MODEL JLS38N, JLS38S)

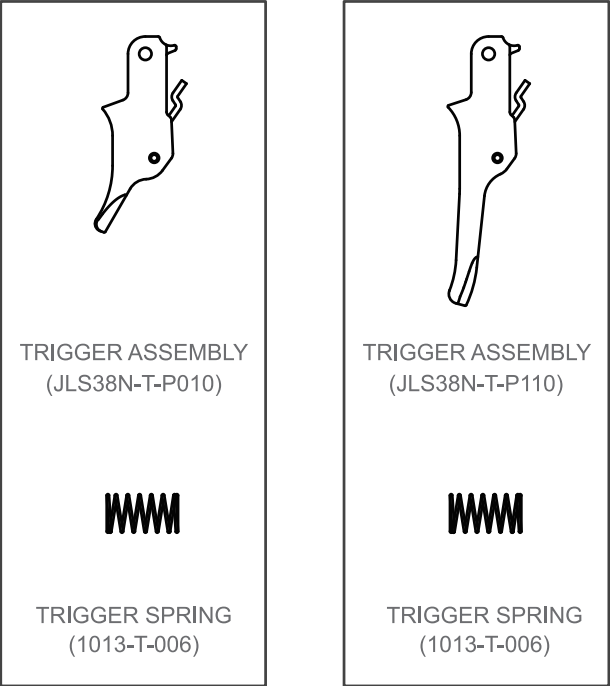


JQS65

15GA.7/16" Crown Stapler

- Dimensions
 - L: 14-1/4" (362mm) H: 12-13/16" (326mm) W: 4" (101mm)
- Weight - 5.51lbs(2.5kg)
- Fasteners
 - SENCO : SQS 55XP
- Applications
 - Sheathing and Sub-flooring
 - Furniture Framing
 - Pallet & Box Assembly
- Air Consumption
 - 1.96L/cycle, 7kg/cm²
- Fastener Specification

Type	15GA. 7/16" Crown Staples
Length	1-1/4"~ 2-1/2" (32mm~65mm)
Crown	7/16" (11.1mm)
Width x Thickness	.067" x .074" (1.70mm x 1.88mm)
Load Capacity	130

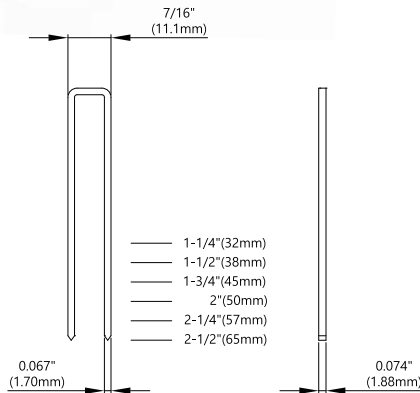


JQS65B

15GA.1/2" Crown Stapler

- Dimensions
 - L: 14-1/4" (362mm) H: 12-13/16" (326mm) W: 4" (101mm)
- Weight - 5.51lbs(2.5kg)
- Fasteners
 - BOSTITCH : 863S4-1
- Applications
 - Sheathing - Sub-flooring
 - Furniture Framing
 - Pallet & Box Assembly
- Air Consumption
 - 1.96L/cycle, 7kg/cm²
- Fastener Specification

Type	15GA. 1/2" Crown Staples
Length	1-1/4"~ 2-1/2" (32mm~65mm)
Crown	1/2" (12.7mm)
Width x Thickness	.067" x .074" (1.70mm~1.88mm)
Load Capacity	130

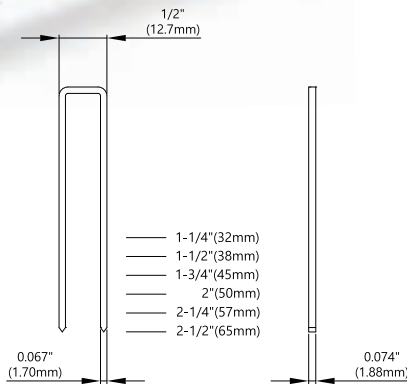


JMS38

18GA. 3/8" Medium Crown Stapler

- Dimensions
 - L: 12-1/8" (307mm) H: 9-5/16" (236.5mm) W: 2-3/8" (60mm)
- Weight - 2.89lbs(1.31kg)
- Fasteners
 - SENCO : SLS/M Series
- Applications
 - Sheathing - Vinyl siding
 - Sub-flooring - Furniture
 - Pallet & Box Assembly - Furniture Framing
- Air Consumption
 - 0.69L/cycle, 7kg/cm²
- Fastener Specification

Type	18GA. 3/8" Medium Crown Staples
Length	3/8"~ 1-1/2" (10mm~38mm)
Crown	3/8" (11.1mm)
Width x Thickness	.040" x .050" (1.04mm~1.27mm)
Load Capacity	170

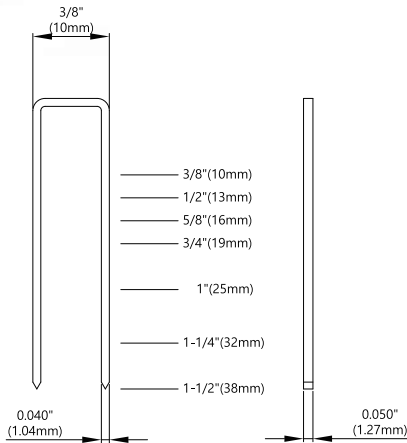

SIDING CONTACT ARM (JMS38-S-002)




JS16-50

20GA. 1/2" Crown Stapler

- Dimensions
 - L: 8-15/16" (227mm) H: 6-13/16" (147mm) W: 1-7/8" (47mm)
- Weight - 1.98lbs(0.90kg)
- Fasteners
 - BEA : 95 Series
 - DUO FAST : SureShot 5020/5000
- Applications
 - Upholstery & Bedding
 - Furniture Manufacturing

- Air Consumption
 - 0.17L/cycle, 6kg/cm²
- Fastener Specification

Type	20GA. 1/2" Crown Staples
Length	3/16" ~ 5/8" (5mm ~ 16mm)
Crown	1/2" (12.5mm)
Width x Thickness	.019" x .050" (0.55mm x 1.27mm)
Load Capacity	95

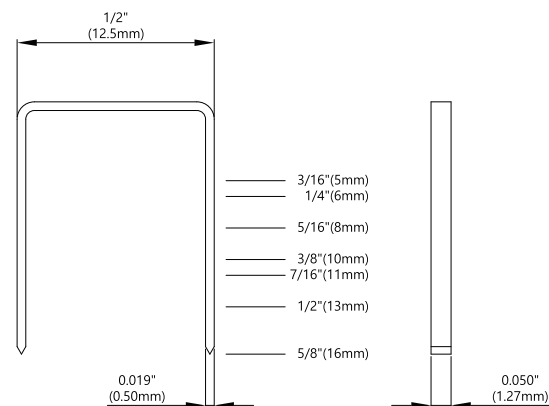


S71/16-22LN

22GA. 3/8" Long Nose Crown Stapler

- Dimensions
 - L: 8-15/32" (215mm) H: 7-5/8" (194mm) W: 1-11/16" (43mm)
- Weight - 2.36lbs(1.07kg)
- Fasteners
 - BEA : 71/71 Series
 - DUO FAST : 3118/3100
 - SENCO : SFW08/C
 - BOSTITCH : BA T401/BA-71
- Applications
 - Cabinets
 - Bedding industry
 - Automobile industry
 - Upholstered furniture

- Air Consumption
 - 0.17L/cycle, 6kg/cm²
- Fastener Specification

Type	22GA. 3/8" Long Nose Crown Staples
Length	5/32" ~ 5/8" (4mm ~ 16mm)
Crown	3/8" (8.8mm)
Width x Thickness	.022" x .030" (0.55mm x 0.76mm)
Load Capacity	190

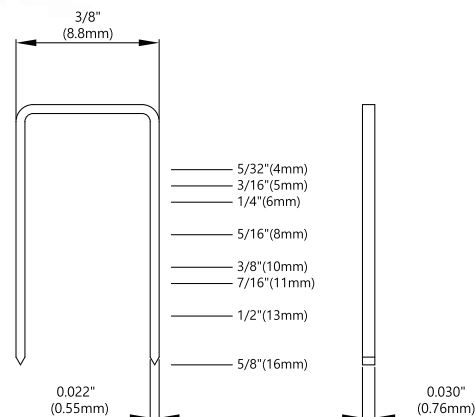

S71/16-22ALM

22GA. 3/8" Crown
Double Length Magazine
Auto Stapler



Easy Firing system
from single fire
to auto fire



Auto fire rate
can be adjusted
from 0 to 27 staples
per second




Same hand
magazine pinky
release

● Features

- Easy Firing System
- Extended Magazine
- Durable Metal Magazine
- Easy Magazine On/Off system
- Auto fire rate can be adjusted from 0 to 27 staples/sec

● Fastener Specifications

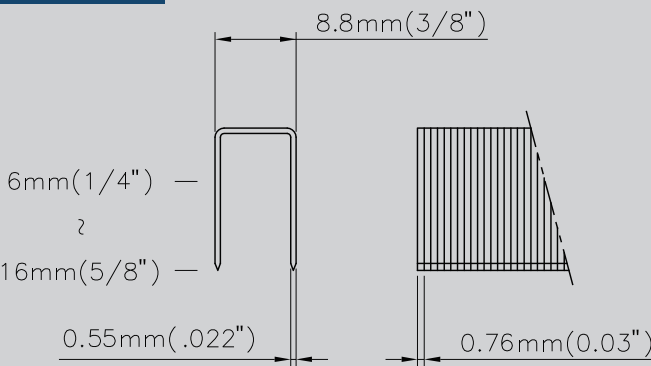

S71/16-22

22GA. 3/8" Crown Stapler

● Dimensions

- L: 8-15/32"(215mm) H: 5-11/16"(145mm) W: 1-11/16"(43mm)

● Weight - 2.16lbs(0.98kg)

● Fasteners

- BEA : 71/71 Series - DUO FAST : 3118/3100
- SENCO : SFW08/C - BOSTITCH : BA T401/BA-71

● Applications


- Cabinets - Bedding industry
- Automobile industry
- Upholstered furniture

● Air Consumption

- 0.17L/cycle, 6kg/cm²

● Fastener Specification

Type	22GA. 3/8" Crown Staples
Length	5/32" ~ 5/8" (4mm ~ 16mm)
Crown	3/8" (8.8mm)
Width x Thickness	.022" x .030" (0.55mm x 0.76mm)
Load Capacity	190

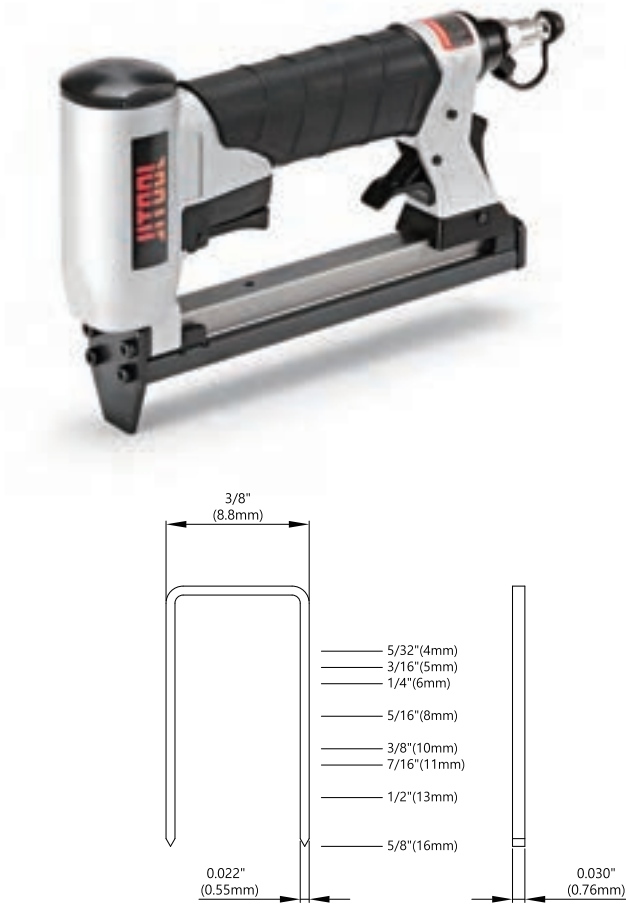

S71/16-22ALM

22GA. 3/8" Crown
Double Length Magazine
Auto Stapler

● Dimensions

- L: 14" (356mm) H: 6-1/8" (155mm) W: 1-21/32" (42mm)

● Weight - 2.95lbs(1.35kg)

● Fasteners

- BEA : 71/14-451AL
- FASCO : F1B 7C-16AUT. L.M

● Applications

- Insulation - Upholstering operations
- Automotive vinyl roofs and interior trim
- Molding and roofing felt - Cabinets

● Air Consumption

- 0.18L/cycle, 6kg/cm²

● Fastener Specification

Type	22GA. 3/8" Crown Staples
Length	1/4" ~ 5/8" (6mm ~ 16mm)
Crown	3/8" (8.8mm)
Width x Thickness	.022" x .030" (0.55mm x 0.76mm)
Load Capacity	330(MAX.378)



S71/16-22A

22GA. 3/8" Crown Auto Stapler

● Dimensions

- L: 12-1/2" (233mm) H: 6-1/8" (155mm) W: 1-21/32" (42mm)

● Weight - 2.65lbs(1.2kg)

● Fasteners

- BEA : 71/14-451AL
- FASCO : 7C-16AUT

● Applications


- Insulation - Upholstering operations
- Automotive vinyl roofs and interior trim
- Molding and roofing felt - Cabinets

● Air Consumption

- 0.18L/cycle, 6kg/cm²

● Fastener Specification

Type	22GA. 3/8" Crown Staples
Length	1/4" ~ 5/8" (6mm ~ 16mm)
Crown	3/8" (8.8mm)
Width x Thickness	.022" x .030" (0.55mm x 0.76mm)
Load Capacity	165(MAX.185)

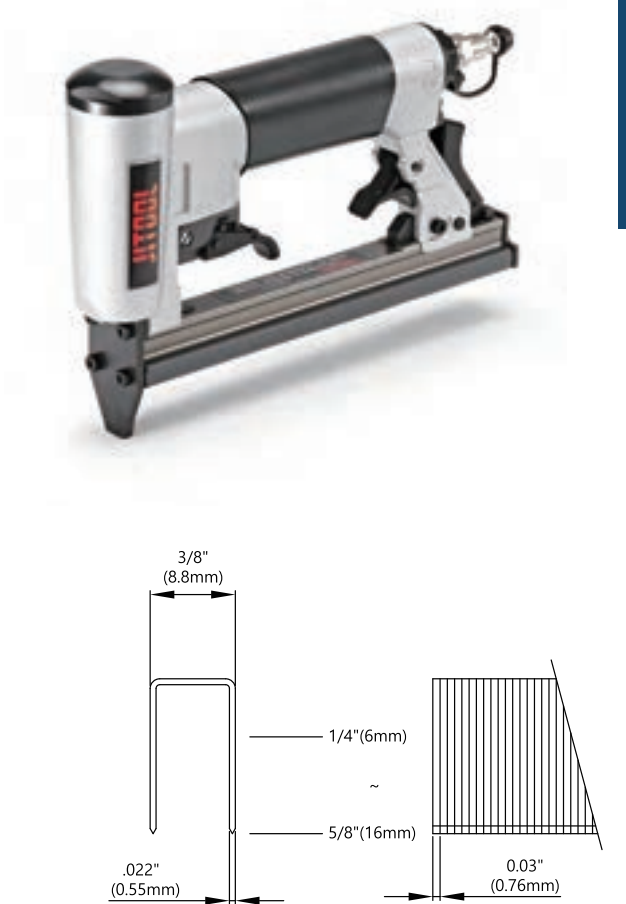

S80/16-20

20GA. 1/2" Crown Stapler

● Dimensions

- L: 8-15/32"(215mm) H: 5-11/16"(145mm) W: 1-11/16"(43mm)

● Weight - 2.13lbs(0.97kg)

● Fasteners

- BEA : 380/80 Series
- BOSTITCH : BA T400/BA-80

● Applications

- Upholstered furniture - Bedding industry
- TV & stereo cabinets - Wicker & rattan furniture
- Automobile industry

● Air Consumption

- 0.17L/cycle, 6kg/cm²

● Fastener Specification

Type	20GA. 1/2" Crown Staples
Length	5/32" ~ 5/8" (4mm ~ 16mm)
Crown	1/2" (12.8mm)
Width x Thickness	.028" x .036" (0.71mm x 0.92mm)
Load Capacity	155



S80/16-20ALM


20GA. 1/2" Crown
Double Length Magazine
Auto Stapler

- Dimensions
 - L: 14" (356mm) H: 6-1/8" (155mm) W: 1-21/32" (42mm)
- Weight - 2.86lbs(1.3kg)
- Fasteners
 - BEA: 80/14-450ALM
 - FASCO: F1B 80-16 ALM
- Applications
 - Upholstery & Bedding
 - Furniture Manufacturing

- Air Consumption
 - 0.18L/cycle, 6kg/cm²

- Fastener Specification

Type	20GA. 1/2" Crown Staples
Length	1/4" ~ 5/8" (6mm ~ 16mm)
Crown	1/2" (12.8mm)
Width x Thickness	.028" x .036" (0.71mm x 0.92mm)
Load Capacity	260

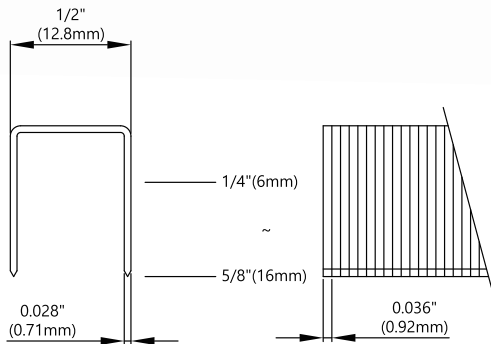


S80/16-20A

20GA. 1/2" Crown Auto Stapler

- Dimensions
 - L: 12-1/2" (233mm) H: 6-1/8" (155mm) W: 1-21/32"(42mm)
- Weight - 2.47lbs(1.12kg)
- Fasteners
 - BEA : 380/14-450A
 - FASCO : F1B A80-16 AUT
- Applications
 - Insulation - Upholstering operations
 - Automotive vinyl roofs and interior trim
 - Molding and roofing felt
- Air Consumption
 - 0.18L/cycle, 6kg/cm²

- Fastener Specification

Type	20GA. 1/2" Crown Staples
Length	1/4 ~ 5/8" (6mm ~ 16mm)
Crown	1/2" (12.8mm)
Width x Thickness	.028" x .036" (0.71mm x 0.92mm)
Load Capacity	130(MAX. 150)

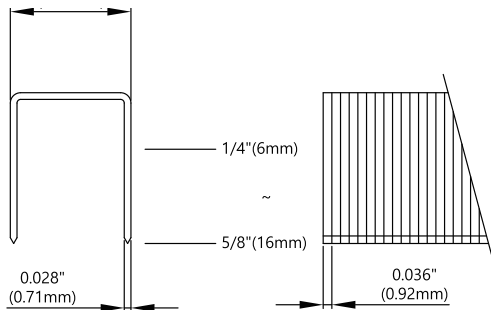

S34/16-22


22GA. 3/16" Crown Stapler

- Dimensions
 - L: 8-27/32" (225mm) H: 5-13/16" (147mm) W: 1-11/16" (43mm)
- Weight - 2.13lbs(0.97kg)
- Fasteners
 - SENCO: A Series
- Applications
 - Upholstery & Bedding
 - Furniture Manufacturing

- Air Consumption
 - 0.17L/cycle, 6kg/cm²

- Fastener Specification

Type	22GA. 3/16" Crown Staples
Length	5/32" ~ 5/8" (4mm ~ 16mm)
Crown	3/16" (4.7mm)
Width x Thickness	.022" x .030" (0.55mm x 0.76mm)
Load Capacity	175

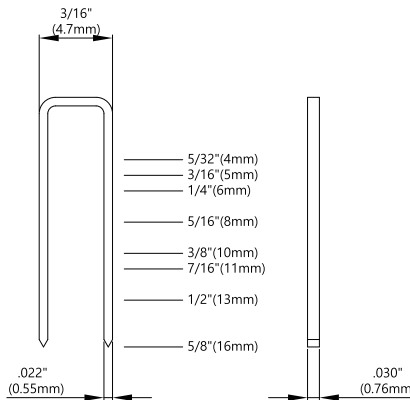


S34/16-22A

22GA. 3/16" Crown Auto Stapler

- Dimensions
 - L: 8-27/32" (225mm) H: 6-1/8" (155mm) W: 1-21/32" (42mm)
- Weight - 2.34lbs(1.06kg)
- Fasteners
 - SENCO : SFT10XP A/D-WIRE
- Applications
 - Upholstery & Bedding
 - Furniture Manufacturing
- Air Consumption
 - 0.18L/cycle, 6kg/cm²

- Fastener Specification

Type	22GA. 3/16" Crown Staples
Length	1/4" ~ 5/8" (6mm ~ 16mm)
Crown	3/16" (4.7mm)
Width x Thickness	.022" x .030" (0.50mm x 1.27mm)
Load Capacity	175

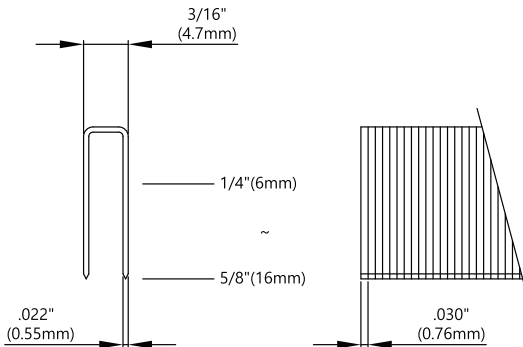

S50/16-20ALM


20GA. 1/2" Crown
Double Length Magazine
Auto Stapler

- Dimensions
 - L: 14" (356mm) H: 6-1/8" (155mm) W: 1-21/32" (42mm)
- Weight - 2.86lbs(1.3kg)
- Fasteners
 - BEA: 95/14-455AL
 - FASCO: F1B 50-16 Auto L/M
- Applications
 - Upholstery & Bedding
 - Furniture Manufacturing

- Air Consumption
 - 0.18L/cycle, 6kg/cm²

● Fastener Specification

Type	20GA. 1/2" Crown Staples
Length	1/4" ~ 5/8" (6mm ~ 16mm)
Crown	1/2" (12.5mm)
Width x Thickness	.019" x .050" (0.50mm x 1.27mm)
Load Capacity	170(Max. 190)

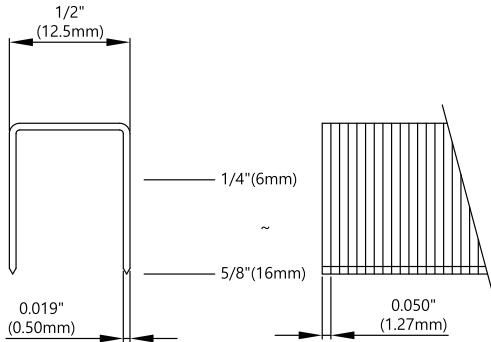

S54/16-20


20GA. 3/16" Crown Stapler

- Dimensions
 - L: 8-27/32" (225mm) H: 5-13/16" (147mm) W: 1-11/16" (43mm)
- Weight - 2.13lbs(0.97kg)
- Fasteners
 - DUO FAST : SureShot 5254/5400
- Applications
 - Upholstery & Bedding
 - Furniture Manufacturing

- Air Consumption
 - 0.17L/cycle, 6kg/cm²

● Fastener Specification

Type	20GA. 3/16" Crown Staples
Length	5/32" ~ 5/8" (4mm ~ 16mm)
Crown	3/16" (4.5mm)
Width x Thickness	.019" x .050" (0.50mm x 1.27mm)
Load Capacity	95

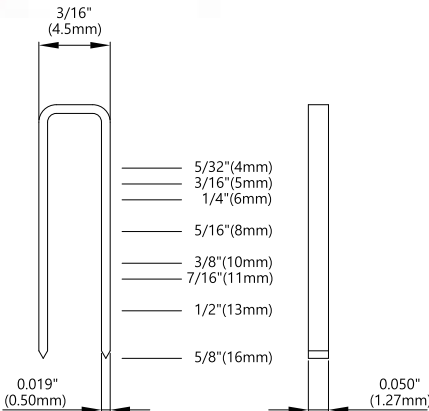

AP35RN

Air Punch

- Dimensions
 - L: 8-3/8" (214mm)
 - H: 8-15/32" (215mm)
 - W: 2-11/32" (60mm)
- Weight
 - 1.83lbs(0.83kg)
- Shank Diameter
 - Ø1.5 ~ Ø5.0mm
- Applications
 - Removing Nails
- Air Consumption
 - 0.56L/cycle, 6kg/cm²



AP64RN

Air Punch

- Dimensions
 - L: 10-13/16" (275mm)
 - H: 10-19/32" (269mm)
 - W: 3-15/32" (88mm)
- Weight
 - 3.75lbs(1.7kg)
- Shank Diameter
 - Ø3.5 ~ Ø6.0mm
- Applications
 - Removing Nails
- Air Consumption
 - 1.48L/cycle, 7kg/cm²

